

Avera/T™

Professional, 1 RU, Affordable, DVB-T Receiver with SD and HD MPEG-2 and H.264 Decoder. Supports DVB-T and ASI In and HDMI, YPbPr, CVBS, SDI, and HD-SDI Out. Supports MPEG-1 Layer II Audio. Includes Web-based Management.



Features

- Inputs:
 - DVB-T
 - DVB-ASI
- Outputs:
 - HDMI
 - YPbPr
 - CVBS
 - HD/SD-SDI
 - DVB-ASI
- Receives MPEG-4/H.264 or MPEG-2 transport streams
- Two common interfaces work simultaneously to support multi-channel decryption
- Compatible with Multi-decrypt CI Modules
- Program filtering support
- MPEG-1 Layer II audio encoding
- VBI teletext, EBU subtitle and DVB subtitle processing
- Supports PAL, NTSC and SECAM
- Supports CAM cards – SMiT brand recommended
- Network management and SNMP support
- Front panel controls
- DVB-S/DVB-S2 version also available

Applications


- H.264 or MPEG-2 Transport Stream Decoder
- Confidence monitoring of ASI equipment
- Content repurposing

Overview

H.264, also called MPEG-4 Part 10, or MPEG-4 AVC, is the next generation codec that is optimized to deliver high quality digital video at significantly lower bit rates. It has the same video quality as MPEG-2, and uses less than 60% of the bandwidth for the same quality. DVB-T is the European and Australian terrestrial digital television standard.

The Avera/T™ is our SD or HD MPEG-4/H.264 or MPEG-2 integrated receiver decoder for both high definition and standard definition video. It accepts DVB-T and DVB-ASI input. The output options include CVBS, YPbPr, AES/EBU digital audio, HDMI, DVB-ASI, and HD/SD-SDI, allowing the system to integrate with various applications. Controlled and monitored by remote web-based management and front panel controls, this user-friendly decoder is ideal for signal conversion and distribution.

Application Example

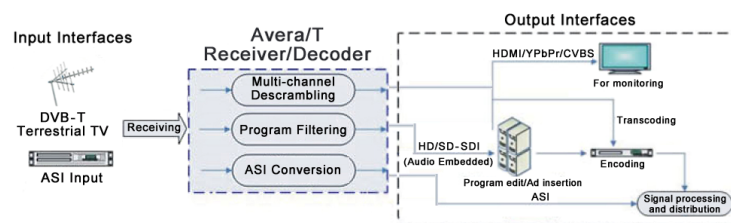

Computer Modules, Inc.


11409 West Bernardo Court
San Diego, CA 92127

Tel: 858-613-1818 Fax: 858-613-1815

www.dveo.com

Avera/T™

Rear View

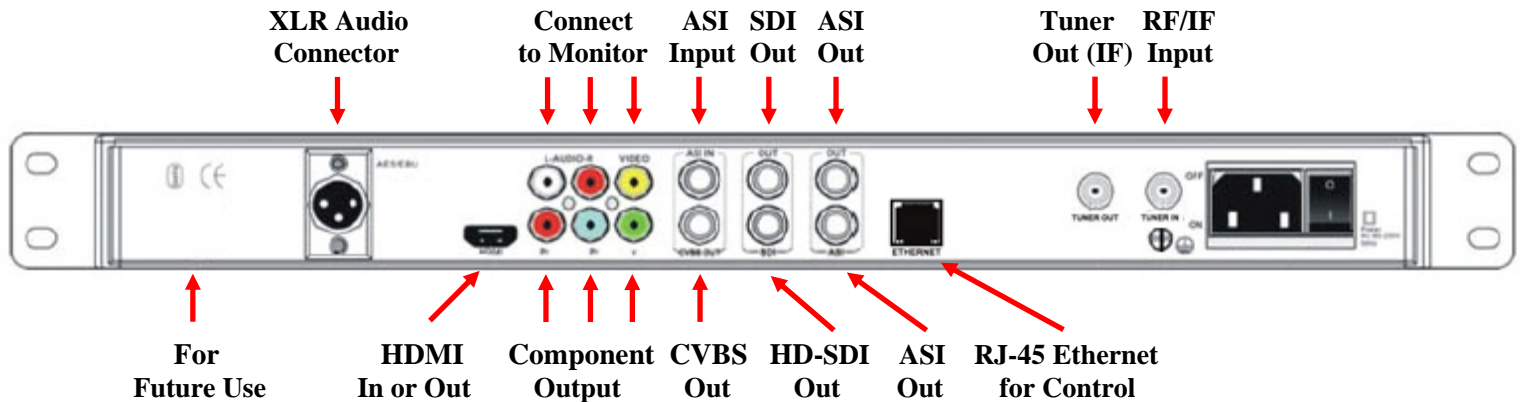

Specifications

DVB-T Input

Constellation:	CODFM, 2K & 8 K FTT
Symbol Rate:	0.45-7 Mbps
Frequency:	45 – 858 MHz
Signal Level:	-90 ~ -205 dBuV

DVB-ASI Input

Connector:	BNC 75 ohm
Packet Length:	188 and 204 byte packets
TS Max bitrate:	72 Mbps

Condition Access

Interface:	Two independent CI slots
CA Methods:	Multicrypt, Simulcrypt
CAS:	Conax, Irdeto, Viaccess, Nagravision, CTI, DV-crypt, etc.

Video/Audio Outputs

CVBS:	Two – 1 BNC, 1 RCA
Component:	One (YPbPr)
HDMI:	One – with HDCP, 720p and 1080i
HD/SD-SDI:	Two – with embedded digital audio
Audio:	One AES/EBU digital audio output

DVB-ASI Outputs (2)

Connector:	BNC 75 ohm
Packet Length:	188 byte packets
TS Max Bit Rate:	72 Mbps

Video and Audio Decoding

Video decoding formats:	MPEG-2 and H.264, SD and HD
Video formats:	480i, 480p, 576i, 720p, 1080i
Analog output:	PAL, NTSC, SECAM
Audio decoding:	2 stereo pairs audio decoding MPEG-1 and MPEG-2 Layer I and II

Control & Monitoring

Local:	Front panel operation – LCD display, Control keys
Remote:	Remote Web-based management via Ethernet (TCP/IP)

Physical & Power

Input Voltage:	AC 90V ~ 240V, 50/60 Hz
Power Consumption:	30W
Dimensions – 1 RU 19 inch rack:	19" (W) x 10.8" (D) x 1.7" (H) 484 (W) mm x 274 mm (D) x 44 mm
Weight:	8.14 lbs. (3.7 Kg.)
Conformities:	FCC, CE, RoHS

Ordering Info

Avera/T

Also available: Avera/S+S2

© 2011 Computer Modules, Inc. DVEO, Avera/S+S2, and Avera/T are trademarks of Computer Modules, Inc. All other trademarks and registered trademarks are the properties of their respective owners. All rights reserved. Specifications are subject to change without notice.

DVEO
Broadcast Division

Computer Modules, Inc.

11409 West Bernardo Court

San Diego, CA 92127

Tel: 858-613-1818 Fax: 858-613-1815

www.dveo.com