

(((MultiStreamer))) QAM/IP™ (mini)

Real Time, 1 RU, Quick Starting, Embedded Linux® Based, Remotely Manageable, Encoder, H.264/AVC Transcoder and Live Streamer with Analog or Digital Clear QAM Input and/or IP Input and Concurrent Multi Stream, Multi Resolution, Multiprotocol IP Output. Encodes Uncompressed Analog or Digital QAM Video and Audio into a Compressed IP Transport Stream with Various “Wrappers”. Audio Support for AAC, Embedded Pass-through, Ogg Vorbis, Optional MP3, or Optional “SurCode for Dolby Digital” AC-3. Encodes at .1 to 15 Mbps. Ideal RF Gateway for Streaming Video to Remote Sites, Content Delivery Networks (CDNs), or IPTV Compatible Appliances or Players. Ships with HLS Streaming Enabled.



Features

- Supports both HD and SD H.264/ MPEG-4 AVC encoding with auto detection and “virtual” stream replication
- Input: One Analog or Digital Clear QAM input, one GigE IP input
- Output: Multiple simultaneous IP streams through GigE port (RJ45)
- IP Output protocols: HTTP Live (HLS), HTTP, UDP, RTP, RTSP, multicast and unicast with transport stream envelope, HTTP Smooth, HTTP Dynamic, FTP, RTMP (Open Flash), or WMV9 with HTTP/ASF
- Support for all 3 flavors of segmented streaming: Apple® HTTP live, Windows® HTTP smooth and Flash HTTP dynamic. These streams can be played by Apple® and Android devices as well as Silverlight and Flash Clients.
- Able to upconvert incoming SD streams to HD
- Can serve streams in RTMP protocol for direct playback using Flash players or for publishing to CDNs
- Can output WMV9/WMA streams in Windows® HTTP/ASF envelope for direct playback using Windows® Media Player
- Supports M3u8 playlist files (standalone and through HTTP live)
- Supports H.264 High Profile @ Level 4.0 (HP@L4)
- Supports 1080i, 1080p, 720i, 720p, 480i, CIF, QCIF, qHD, H.264up and many others, and custom resolutions
- Creates simultaneous High, Medium, and Low bitrate streams
- Built-in SSL VPN client for secure transport of streams across the internet or for traversing complicated networks. The tunnel is based on OpenVPN and it works for both multicast and unicast traffic.
- Audio Output: AAC, Embedded pass-through, Ogg Vorbis, optional MP3, or optional “SurCode for Dolby Digital” AC-3
- Tested compatible with major brands of IP devices including Amino™, Roku®, Atlanta DTH, and Apple iPad® and iPhone®
- Tested compatible with major brands of H.264 decoders
- Supports hundreds of IPTV clients (depends on bandwidth)
- Configure and operate via Remote GUI
- Can be used to store or time-delay incoming stream with optional storage add-on
- SNMP remote management with low power consumption due to Sandy Bridge Intel CPU
- Ships with one HLS streaming enabled – for instant QA of functionality

Overview

Inexpensive high volume hardware platforms combined with highly enhanced open source Linux® based software offer great value to all willing to embrace the future. Furthermore, Intel’s “Sandy Bridge” architecture is highly tuned to encoding and transcoding tasks. We offer high performance streaming solutions that are based on open source libraries. We enhance the libraries by rewriting critical sections to obtain outstanding reliability and throughput.

The **MultiStreamer QAM/IP™** is a highly affordable 4 core based multi channel RF to IP gateway and H.264 encoder and transcoder designed for capturing QAM based MPEG-2 content and streaming this content to iPads, iPhones, content delivery networks, and remote video capture devices.

The MultiStreamer QAM/IP is designed to be an affordable platform to ingest video from terrestrial broadcast stations, transcode the MPEG-2 to the H.264 standard, and provide for choices for resolutions, protocols, wrappers, and containers. This is easy to do since we are using Linux® and these outputs are well supported by the Linux® environment.

This unit is designed to be affordable, scalable, and extendable. We offer local store and forward as an option. Modifications to video formats are easily created. Remote management and multi level security is built in.

If you do not have a static IP address, to assist you for fast setup we have a preconfigured Cisco router available for \$300.00.

Applications

- Streaming video from remote sites to HTTP, HLS, RTSP, etc. compatible appliances
- Backhaul/Monitoring for Broadcasters
- Military, Corporate Video, Church Services, Special Events

DVEO
Broadcast Division

Computer Modules, Inc.


11409 West Bernardo Court

San Diego, CA 92127


Tel: 858-613-1818 Fax: 858-613-1815

www.dveo.com


Inputs/Outputs

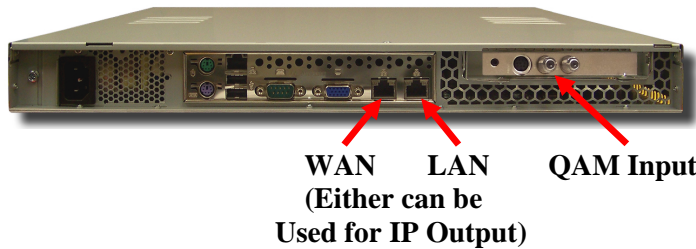

Sample of GUIs

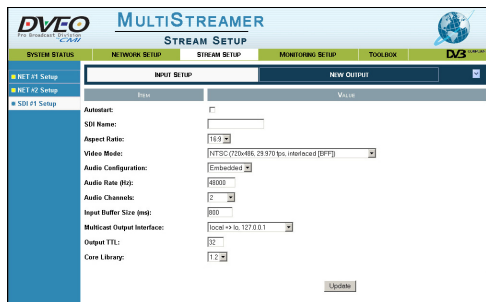

Input Setup

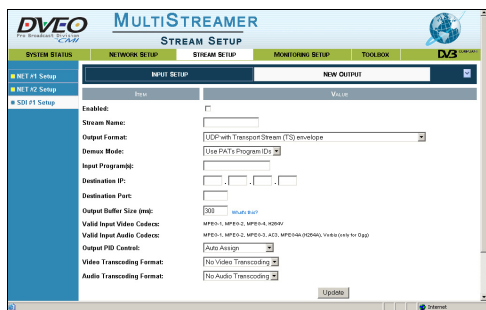

Output Setup

Ports Utilized

Protocol	TCP Ports	UDP Ports
HTTP	80, 8000, 8001, 8080, 1-65535 (out)	
HTTPS	443	
RTSP	554, 7070	6970-7170, 5004 (out) 5005 (in/out)
RTMP		1935
RTP		6970-6999, 16384-32767

CDNs Tested With:

1. Akamai
2. Limelight
3. BitGravity
4. Octoshape
5. Highwinds
6. Edgecast
7. More to come!

Ordering Information

- MultiStreamer QAM/IP in 1 RU system
- MultiStreamer QAM/IP/Delay (Store and Forward) in 1 RU system with real time store and forward (time delay) option
- MultiStreamer Support – Two hours
- CISCO – RTR: Optional pre-configured Cisco® 4 port Gigabit router
- iPad®: Optional 16 MB iPad®

Specifications

Supported Resolutions – Input and Output

1920 x 1080	720 x 480	480 x 480	qHD H.264up
1280 x 720	704 x 480	480 x 320	
720 x 576	640 x 480	320 x 240	

Also supports any custom resolution not listed here.
Note: Supports closed captions.

QAM Input

Video:	Analog or Digital Clear QAM
Audio:	Analog or Digital Clear QAM

IP Input

IP Input protocols, “wrappers”:	UDP, RTP, RTSP, HTTP, HTTP Live (HLS), FTP, RTMP (Open Flash), Windows® Media Video 9 with HTTP/ASF
---------------------------------	---

IP Output

Outputs:	2 1080i/p or 4 720p HD streams at 6 Mbps or 7 SD streams at 2 Mbps with 4 Core
Audio Output:	AAC, Embedded pass-through, Ogg Vorbis, optional MP3, or optional “SurCode for Dolby Digital” AC-3
Output “wrappers”:	UDP, RTP, RTSP, HTTP, HTTP Live (HLS), HTTP Smooth, HTTP Dynamic, FTP, RTMP (Open Flash), Windows® Media Video 9 with HTTP/ASF
Type:	IP-multicast, IP-unicast, IGMP
H.264 bit rates:	Multiple H.264 video streams at different bit rates (.1 to 15 mbps), resolutions, and protocols, wrappers, and containers

Administration

Access:	Web interface, ssh interface
SNMP:	Monitoring and alerts


CPU and Operating System

CPU:	Intel Multicore Xeon 4 Core
OS:	DVEO embedded Linux® in Flash™

Physical & Power

Size:	19” rack mounted, 1 RU high
Voltage:	100-240V, 4-2A, 60-50 Hz, 220 watts
Operating Temperature:	10°C to 35°C
Non-operating Humidity:	20% to 90% non-condensing
Conformities:	UL, BSMI, CSA, FCC, CE, RoHs
Weight:	15 lbs.

Block Diagram

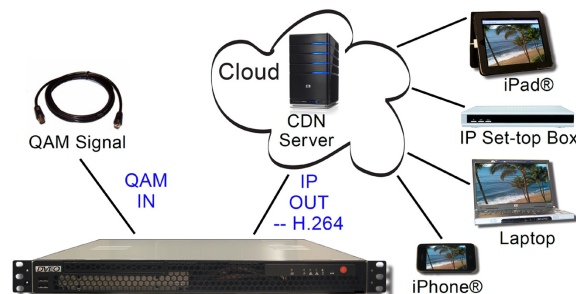

Computer Modules, Inc.

11409 West Bernardo Court

San Diego, CA 92127

Tel: 858-613-1818 Fax: 858-613-1815

www.dveo.com